

CONTROLLED MANIFOLD ASSEMBLIES







Working pressure 10000 psi

Up to 4 outlets with individual control on each

Choice of manifolds for single or double acting systems

- ▶ Pressure gauges fitted to advance ports on all models
- ▶ Quick connect couplings fitted as standard to all inlet and outlet ports
- ▶ Precise control of oil flow and pressure within the hydraulic system

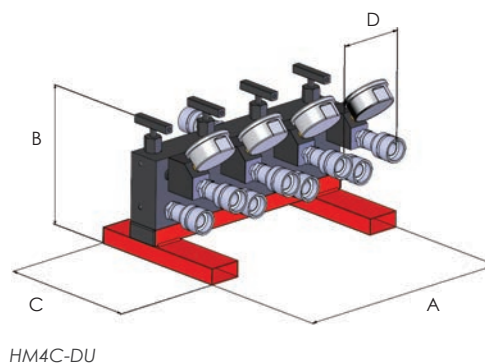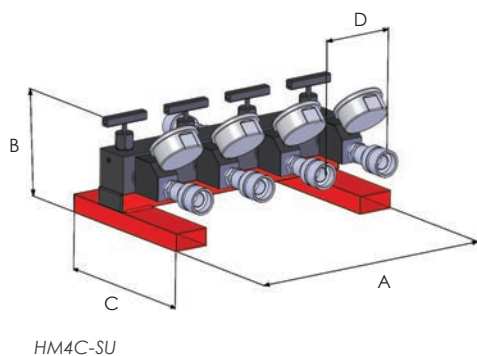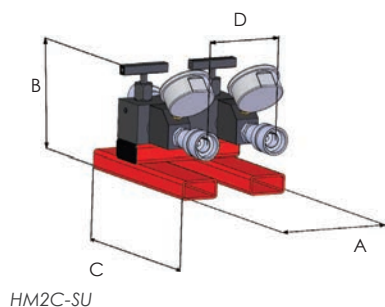

Model number	Description	Weight (lbs)	A	Dimensions (in) B	C	D
HM2C-SU	2-way controlled manifold unit, suitable for single acting systems	4.4	5.91	5.83	8.98	3.94
HM2C-DU	2-way controlled manifold unit, suitable for double acting systems	6.6	5.91	7.8	8.98	3.94
HM4C-SU	4-way controlled manifold unit, suitable for single acting systems	7.7	13.79	5.83	8.98	3.94
HM4C-DU	4-way controlled manifold unit, suitable for double acting systems	13.2	13.79	7.8	8.98	3.94