

HMJ | STEEL MACHINE LIFT JACKS




Capacities of 11 and 28 tons

Stroke length 5.91 inches

10000 psi maximum working pressure

- ▶ Lifting toe is precision guided throughout its lifting stroke to reduce friction and prevent potential side loading of the hydraulic cylinder
- ▶ Operated using a remote pump and hose for increased operator safety
- ▶ Lifting toe with minimum height of 1 inch, can be pre-set at three lifting positions
- ▶ Suitable for multiple lift point applications

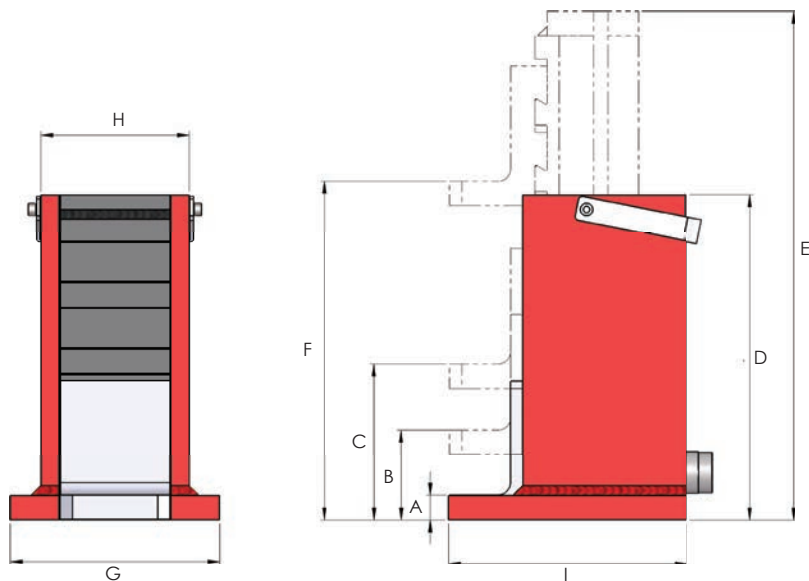

Model number	Capacity (tons)		Stroke (in)	Weight (lbs)	Dimensions (in)								
	Toe	Head			A	B	C	D	E	F	G	H	I
HMJ10	9	11	5.91	64.4	0.99	3.11	5.24	10.72	16.63	11.15	7.96	4.81	7.37
HMJ25	22	28	5.91	121.5	1.38	4.61	7.84	13	18.91	13.75	11.5	5.99	8.31

Note: Maximum permissible input hydraulic pressure when lifting on the jack toe is 8630 psi for HMJ10 and 8120 psi for HMJ25, do not exceed!