

BOLT TENSIONER PUMPS




Operates from standard 7 bar air supply

Air consumption up to 1.59 m³/minute (56 scfm)

Working pressure 21750 psi

AHP-BTU


- ▶ Air driven hydraulic bolt tensioner pump operates from standard 100 psi air supply
- ▶ Lightweight stainless steel protective frame for easy storage and transportation
- ▶ Infinitely variable output pressure and flow rate
- ▶ Fitted with glycerin filled vibra-gauge and quick connect high pressure outlet coupling
- ▶ Airline filter regulator lubricator unit fitted as standard

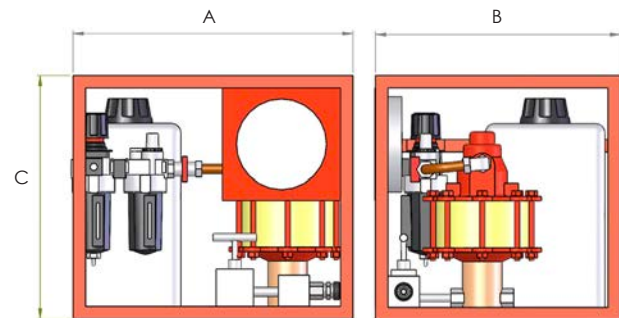

Model number	Usable oil capacity (gallons)	Oil flow per stroke (in ³)	Outlet coupler	Air consumption	Weight (lbs)	Dimensions (in)		
						A	B	C
AHP275BTU	1.98	0.1	STFC4	28 scfm (0.79 m ³ /min)	44.1	17.73	15.56	15.56
AHP2-237BTU	1.98	0.37	STFC4	56 scfm (1.59 m ³ /min)	52.9	17.73	15.37	18.32

HPX-BTU

- ▶ Manually operated high pressure bolt tensioning pump
- ▶ Usable oil capacity 73.23 in³
- ▶ Fitted with external pressure release valve and factory set safety valve
- ▶ Supplied with a dual scale pressure gauge and quick release outlet coupling
- ▶ Bespoke handle with ergonomic grip and mesh guard to protect gauge from accidental damage

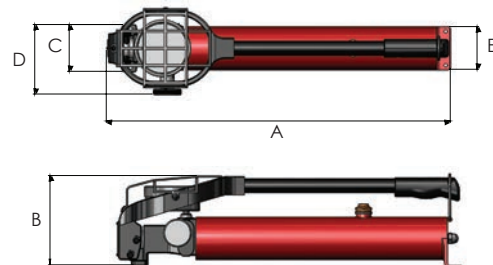

Model number	Usable oil capacity (in ³)	Displacement per stroke (in ³)		Outlet coupler	Weight (lbs)	Dimensions (in)				
		1 st stage	2 nd stage			A	B	C	D	E
HPX1500BTU	73.23	1.22	0.06	STFC4	14.3	24.23	6.34	3.31	4.93	3.01