

HTW | MANUAL TORQUE WRENCHES - BREAK BACK TYPE




Torque capacities from 220 to 1500 lbf.ft

Repeatable accuracy +/- 4%

Dual scale lbf.ft & Nm

- ▶ Choice of 3/4" or 1" square drive sizes
- ▶ Robust steel construction with corrosion resistant finish
- ▶ Push-through square drive for bi-directional torque control
- ▶ Internal cam control ensures controlled 'break' once preset torque is achieved
- ▶ Large break angle prevents possibility of over torqueing
- ▶ Wrench automatically resets once hand pressure is released
- ▶ Marked with a unique serial number and supplied with calibration certificate
- ▶ Supplied in handy plastic storage case

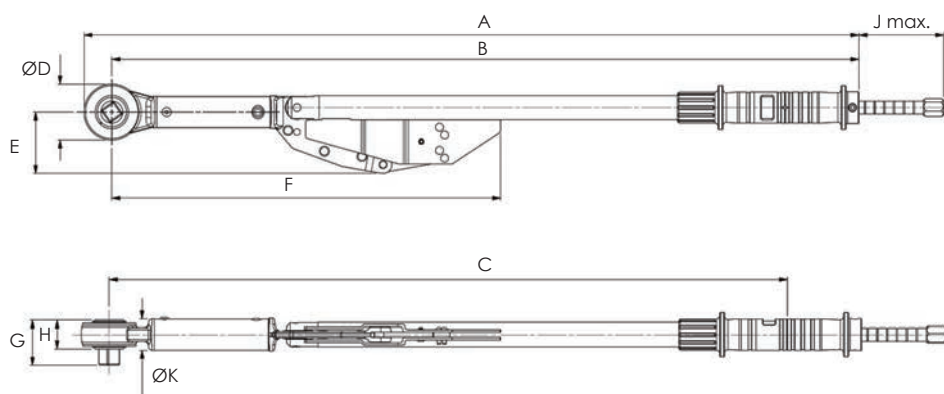

Model number	Square drive	Torque range		Overall length (in)	Ratchet head dia (in)	Weight (lbs)	Dimensions (in)									
		lbf.ft	Nm				A	B	C	ØD	E	F	G	H	J max.	ØK
HTW1000B	¾"	200 - 750	300 - 1000	61.23	2.72	16.3	57.09	55.75	52.17	2.72	2.96	38.38	2.17	1.38	4.14	1.5
HTW1500B	¾"	500 - 1000	700 - 1500	73.64	2.72	21.2	69.5	68.16	64.42	2.72	2.96	54.33	2.17	1.38	4.14	1.5
HTW1800B	1"	500 - 1000	700 - 1500	73.64	2.72	21.2	69.5	68.16	64.42	2.72	2.96	54.33	2.48	1.38	4.14	1.5
HTW2000B	1"	700 - 1500	900 - 2000	76.44	2.72	28.2	73.09	71.71	69.86	2.72	2.96	54.33	2.48	1.38	3.35	1.5