

HTWP | TORQUE WRENCH PUMPS - STANDARD LINE




Working pressure 10000 psi

Two stage operation

Air or electric driven options

HTWP-P - AIR DRIVEN


- ▶ Two stage operation with low pressure flow rate of up to 372.24 inch³ per minute
- ▶ Integral oil cooling system fitted as standard
- ▶ Dual scale (bar/psi) glycerine filled pressure gauge
- ▶ Easily adjustable torque setting pressure relief valve
- ▶ Reservoir oil sight and temperature gauge
- ▶ Air pressure gauge and filter, regulator and lubricator unit fitted on all models
- ▶ Remote hand pendant controller with 10 feet cable for easy operation
- ▶ Factory fitted roll bar protection frame included

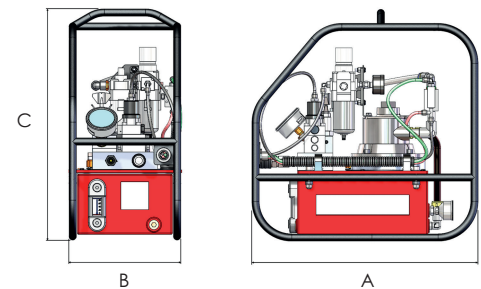

Model number	Power supply	Motor rating (hp)	Flow rate (in ³ /min)		Changeover pressure (psi)	Oil capacity (gallons)	Weight (lbs)	Dimensions (in)		
			low pressure	high pressure				A	B	C
HTWP2140P	100 psi	2.01	372.24	31.12	870	1.32	61.7	19.15	9.5	18.36

HTWP-AR - ELECTRIC DRIVEN

- ▶ Two stage operation with low pressure flow rate of up to 268.5 inch³ per minute
- ▶ 110, 120, 220 and 230 volt single phase electric motor with auto retract function
- ▶ Dual scale (bar/psi) glycerine filled pressure gauge
- ▶ Easily adjustable torque setting pressure relief valve
- ▶ Reservoir oil sight and temperature gauge
- ▶ Remote hand pendant controller with 10 feet cable for easy operation
- ▶ Factory fitted roll bar protection frame included

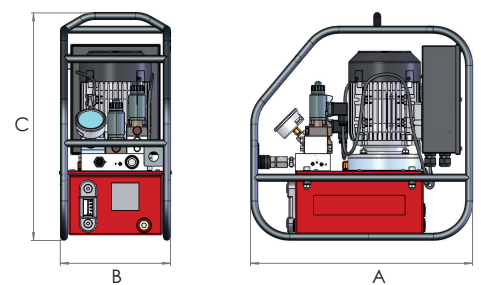

Model number	Power supply	Motor rating (hp)	Flow rate (in ³ /min)		Changeover pressure (psi)	Oil capacity (gallons)	Weight (lbs)	Dimensions (in)		
			low pressure	high pressure				A	B	C
HTWP2141AR	110 volt	1.01	225.79	20.75	870	1.32	75.0	19.15	9.5	18.36
HTWP2141ARH	120 volt	1.01	268.5	24.41	870	1.32	75.0	19.15	9.5	18.36
HTWP2142AR	230 volt	1.01	225.79	20.75	870	1.32	75.0	19.15	9.5	18.36
HTWP2142ARH	220 volt	1.01	268.5	24.41	870	1.32	75.0	19.15	9.5	18.36

Note: Pumps with suffix 'H' in the model number are supplied with 60 Hz electric motor.