

HWRC | DOUBLE ACTING WIRE ROPE CUTTERS




- ▶ Features a double acting cylinder which offers a faster and positive return
- ▶ High grade steel construction
- ▶ Open jaw design cutting head allows easy access for the material to be cut
- ▶ Specially toughened high tensile steel blades and jaws
- ▶ Designed for cutting high tensile locked coil wire ropes and solid steel bars
- ▶ Fitted with quick connect couplings for easy connection to hydraulic pump and hoses

Double acting design

Smooth guillotine cutting action

Working pressure 10000 psi

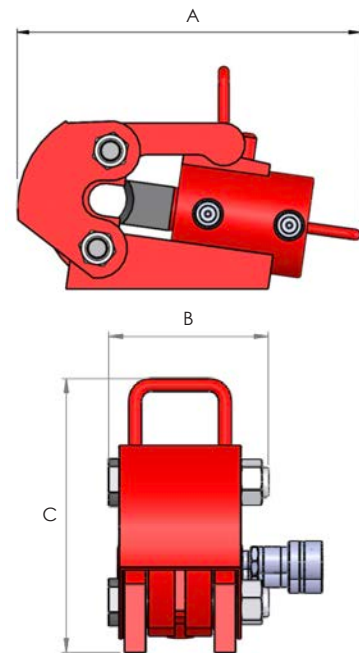

Model number	Output (tons)	Cutting capacity (in)			Oil capacity (in³)	Weight (lbs)	Dimensions (in)		
		Wire rope Ø	Cable	Reinforcing bar			A	B	C
HWRC1115	40	1.5	1.5	0.79	21.35	66.1	15.76	6.11	10.64
HWRC1125	88	2.48	2.48	1.26	54.9	132.3	17.73	7.88	15.37
HWRC1136	88	3.55	3.55	1.26	73.23	154.3	20.29	7.88	15.37
HWRC1145	132	4.49	4.49	1.58	146.46	209.4	22.46	11.03	17.53

Replacement blades for HWRC wire rope cutter models:

Blade part number	For cutter
111511	HWRC1115
112511	HWRC1125
113611	HWRC1136
114511	HWRC1145