

JAH | 铝制千斤顶




- ▶ 轻型铝制结构, 关键部件采用优质钢材制造
- ▶ 可提供平行活塞, 顶升爪或者机械锁紧环
- ▶ 顶升爪工作能力8-24吨
- ▶ 行程限制装置

顶升能力20-60吨

可选择152 mm或305 mm行程长度

内置安全阀

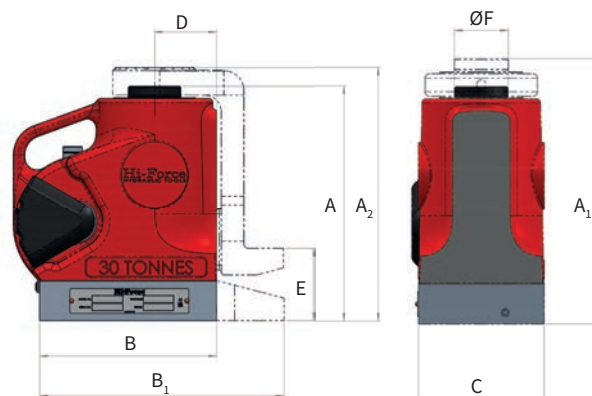

A = 千斤顶带平活塞
A₁ = 千斤顶带平活塞&顶升脚&加长底座
A₂ = 千斤顶带锁紧环
B = 短底座
B₁ = 加长底座

型号	顶升力 (吨)	爪部顶升力 (吨)	行程 (mm)	重量 (kg)
带平活塞的千斤顶				
JAH620	20	-	152	13
JAH1220	20	-	305	18
JAH630	30	-	152	16
JAH1230	30	-	305	24
JAH660	60	-	152	30
JAH1260	60	-	305	46
带平活塞&顶升爪和加长底座的千斤顶				
JAH620C	20	8	152	20
JAH1220C	20	8	305	23
JAH630C	30	12	152	23
JAH1230C	30	12	305	32
JAH660C	60	24	152	49
JAH1260C	60	24	305	67
带锁紧环的千斤顶				
JAH620SR	20	-	152	13
JAH1220SR	20	-	305	19
JAH630SR	30	-	152	17
JAH1230SR	30	-	305	24
JAH660SR	60	-	152	30
JAH1260SR	60	-	305	46

尺寸(mm)									
A	A ₁	A ₂	B	B ₁	C	D	E	F	
267	-	-	178	-	121	57	-	52	
441	-	-	-	245	121	57	-	52	
266	-	-	200	-	140	70	-	60	
454	-	-	-	276	140	70	-	60	
295	-	-	251	-	190	92	-	89	
501	-	-	-	343	190	92	-	89	
-	-	287	-	245	121	57	73	-	
-	-	459	-	245	121	57	72	-	
-	-	287	-	276	140	70	81	-	
-	-	472	-	276	140	70	72	-	
-	-	342	-	343	190	92	94	-	
-	-	545	-	343	190	92	80	-	
-	287	-	178	-	121	57	-	52	
-	462	-	-	244	121	57	-	52	
-	297	-	200	-	140	70	-	60	
-	484	-	-	276	140	70	-	60	
-	325	-	251	-	190	92	-	89	
-	535	-	-	343	190	92	-	89	

注意: 爪部顶升力是千斤顶的40%, 爪部顶升负载不能超过该比例