JCS & JCH | COMPACT JACKS





Capacities from 11 to 33 tons

Stroke lengths from 1.38 to 1.77 inches

Lightweight and compact

- Spring assisted piston retraction (JCS)
- Load return piston (JCH)
- Nitrocarburized steel piston rod for corrosion resistance
- 360 degree positional pumping mechanism for increased versatility
- Internal safety overload valve

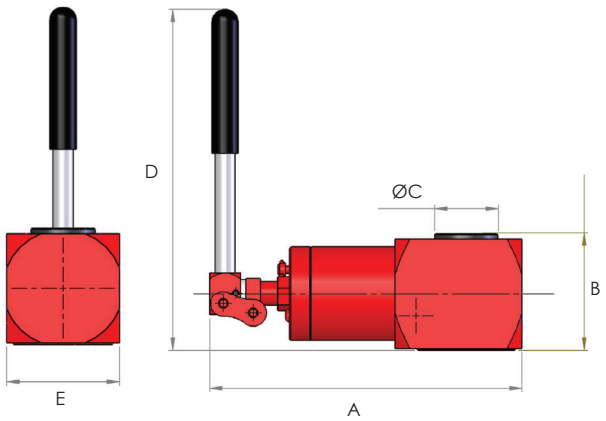



JCS - SOLID PISTON

Model number	Capacity (tons)	Body construction	Stroke (in)	Weight (lbs)	Dimensions (in) A	B	C	D	E	F
JCS10	11	Steel	1.38	9.9	9.46	2.99	1.5	10.48	2.76	-
JCS20	22	Aluminum	1.62	12.1	10.13	4.02	2.01	11.07	4.02	-
JCS30	33	Aluminum	1.77	17.6	11.07	4.41	2.36	11.23	4.93	-

JCH - HOLLOW PISTON

Model number	Capacity (tons)	Body construction	Stroke (in)	Weight (lbs)	Dimensions (in) A	B	C	D	E	F
JCH13	14	Aluminum	1.62	12.1	10.13	3.74	2.01	11.07	4.02	0.99
JCH21	23	Aluminum	1.77	17.6	11.07	4.49	2.36	11.23	4.93	1.38