

JCS | COMPACT JACKS




- ▶ Spring assisted piston retraction
- ▶ Nitrocarburized steel piston rod for corrosion resistance
- ▶ 360 degree positional pumping mechanism for increased versatility
- ▶ Internal safety overload valve

Capacities from 11 to 33 tons

Stroke lengths from 1.38 to 1.77 inches

Lightweight and compact

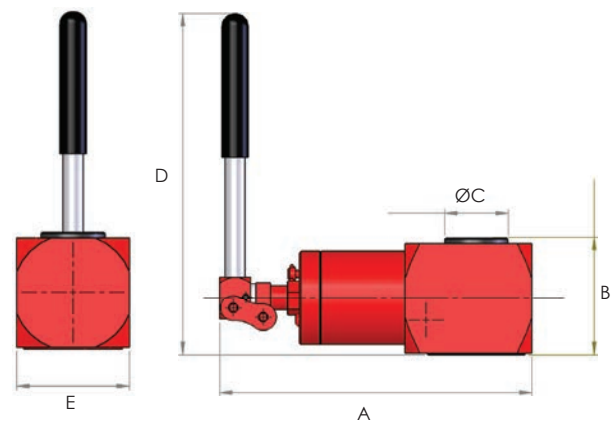

Model number	Capacity (tons)	Body construction	Stroke (in)	Weight (lbs)
JCS10	11	Steel	1.38	9.9
JCS20	22	Aluminum	1.62	12.1
JCS30	33	Aluminum	1.77	17.6

Dimensions (in)				
A	B	C	D	E
9.46	2.99	1.5	10.48	2.76
10.13	4.02	2.01	11.07	4.02
11.07	4.41	2.36	11.23	4.93