

MANIFOLDS




Working pressure 10000 psi


Choice of open or controlled manifolds

2, 4, 6 or 8 outlet port models available

- Designed for easy control of the direction of flow of the hydraulic fluid within the system
- Available as open manifold blocks or with individual needle type shut off/throttle valves on each outlet

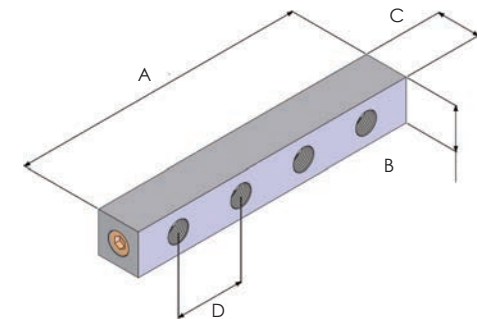

HM* & HM*L

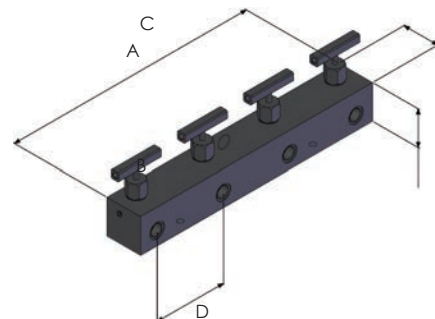

HM*C

Model number	Type	Design	Number of outlets	Connection ports female threads		Weight (lbs)	Dimensions (in)			
				Inlet	Outlet		A	B	C	D
HM2	open manifold	parallel	2	$\frac{3}{8}$ "-18 NPT	2 x $\frac{3}{8}$ "-18 NPT	2.2	4.49	1.26	1.26	1.97
HM4	open manifold	parallel	4	$\frac{3}{8}$ "-18 NPT	4 x $\frac{3}{8}$ "-18 NPT	3.3	8.43	1.26	1.26	1.97
HM6	open manifold	parallel	6	$\frac{3}{8}$ "-18 NPT	6 x $\frac{3}{8}$ "-18 NPT	4.4	12.37	1.26	1.26	1.97
HM8	open manifold	parallel	8	$\frac{3}{8}$ "-18 NPT	8 x $\frac{3}{8}$ "-18 NPT	5.5	16.31	1.26	1.26	1.97
HM4L	open manifold	extended parallel	4	$\frac{3}{8}$ "-18 NPT	4 x $\frac{3}{8}$ "-18 NPT	5.3	15.52	1.26	1.26	4.33
HM6L	open manifold	extended parallel	6	$\frac{3}{8}$ "-18 NPT	6 x $\frac{3}{8}$ "-18 NPT	8.2	24.19	1.26	1.26	4.33
HM2C	controlled manifold	parallel	2	$\frac{3}{8}$ "-18 NPT	2 x $\frac{3}{8}$ "-18 NPT	4.4	5.91	2.01	1.5	3.94
HM4C	controlled manifold	parallel	4	$\frac{3}{8}$ "-18 NPT	4 x $\frac{3}{8}$ "-18 NPT	7.7	13.79	2.01	1.5	3.94