

NTW | MANUAL TORQUE WRENCHES




Torque capacities from 12 to 1000 Nm (10 to 730 lbf.ft)

Square drive sizes from 3/8" to 1"


Dual scale torque reading in Nm & lbf.ft

- ▶ Square drive sizes from 3/8" to 1", with interchangeable 3/4" and 1" drives on selected models
- ▶ Push-through ratchet provides bi-directional torque control and features a narrow engagement angle for easy positioning in confined spaces
- ▶ Clicking system triggers a tactile and audible signal when pre-set torque is achieved
- ▶ Secure push/pull locking mechanism prevents accidental adjustment
- ▶ Repeatable accuracy of +/- 3% in accordance with ISO6789-1:2017 and supplied with individual Declaration of Conformance
- ▶ Alignment pin safeguarding feature physically prevents the use of incompatible attachments, reducing the risk of improper setup (for NTW600, NTW800 and NTW1000 models only)
- ▶ NTW600, NTW800 and NTW1000 models can be split into two parts for a smaller, easier-to-transport package

NTW60, NTW100, NTW200, NTW300

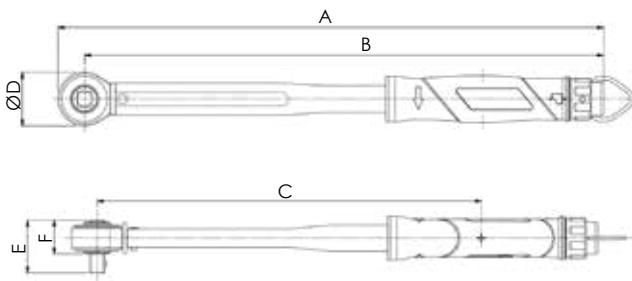

NTW600, NTW800, NTW1000

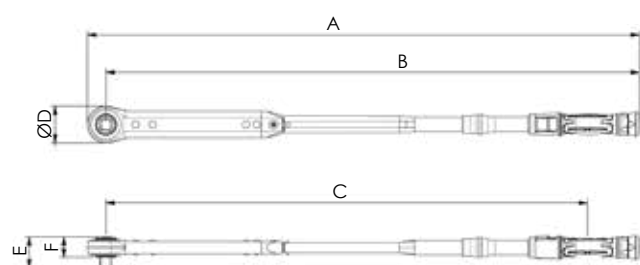

Model number	Square drive	Torque range		Weight (kg)
		Nm	lbf.ft	
NTW60	3/8"	12 - 60	10 - 45	0.7
NTW100	1/2"	20 - 100	20 - 80	0.8
NTW200	1/2"	40 - 200	30 - 150	1.0
NTW300	1/2"	60 - 300	45 - 220	1.4
NTW600	3/4" & 1"	120 - 600	90 - 440	3.5
NTW800	3/4" & 1"	160 - 800	120 - 580	4.6
NTW1000	3/4" & 1"	200 - 1000	150 - 730	5.3

Dimensions (mm)					
A	B	C	ØD	E	F
328	310	209	36	34	21
375	354	252	42	38	22
459	437	335	45	45	25
587	562	460	52	45	25
984	951	859	66	55 - 62.5	35
1179	1142	1050	74	58 - 65.5	38
1429	1392	1300	74	58 - 65.5	38