

PKS | HYDRAULIC 2 & 3 WAY PULLER KITS




- ▶ Available in a choice of 2-way or 3-way puller configurations with 4.5 tonne and 10 tonne models offering a combination head (see Note 3)
- ▶ Incorporates safety overload prevention valve within hydraulic pump
- ▶ Supplied as a complete set with all necessary hydraulic components in handy storage case (see Note 4)

Capacities from 5 to 55 tons

Quick set-up time, easy to use

High quality, drop forged steel components

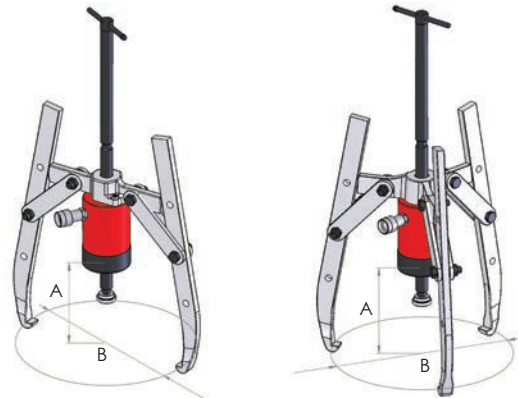

Model number	Capacity (tons)	Type of puller	Cylinder model	Pump model	Weight (lbs)	Dimensions (in)		
						A	B (min)	B (max)
PKS5-2-3	5	2 & 3-way jaw	HSS53	HP110	29.5	8.87	*	9.46
PKS10-2-3	11	2 & 3-way jaw	HHS102	PK10-HP	45.9	11.66	1.97	13.79
PKS20-2	22	2-way jaw	HHS202	PK20-HP	67.9	12.61	2.76	18.91
PKS20-3	22	3-way jaw	HHS202	PK20-HP	78.7	12.61	2.76	18.91
PKS30-2	33	2-way jaw	HHS302	PK30-HP	98.8	16.04	3.55	22.85
PKS30-3	33	3-way jaw	HHS302	PK30-HP	119.9	16.04	3.55	22.85
PKS50-2	55	2-way jaw	HHS603	PK50-HP	218.3	28.64	4.73	36.25
PKS50-3	55	3-way jaw	HHS603	PK50-HP	268.3	28.64	4.73	36.25
PK202	22	2-way jaw beam	*	*	6.6	*	*	*
PK302	33	2-way jaw beam	*	*	8.8	*	*	*
PK502	55	2-way jaw beam	*	*	15.4	*	*	*

Note: 1) PK202, PK302 & PK502 are 2-way jaw beam only for modifying applicable capacity 3-way jaw pullers to 2-way jaw operation.

2) Dimensions calculated with 15° outward angled puller legs.

3) PKS5-2-3 and PKS10-2-3 are supplied with a combination crosshead. This combination crosshead can be used as a 2-jaw puller when the legs are arranged at 180° and as a 3-jaw puller when the legs are arranged at 120°.

4) All PKS puller kits are supplied in a metal storage box with the exception of PKS50-2 and PKS50-3, which are supplied in an alternate storage case.