

TORQUE WRENCH PUMP ACCESSORIES



Hose lengths up to 330 feet

Supplied with quick connect couplers

Working pressure 10000 psi


TORQUE WRENCH HOSES AND COUPLERS

- ▶ High quality hydraulic torque wrench bonded twin hose sets
- ▶ Maximum working pressure of 10000 psi with 4:1 safety factor
- ▶ Ergonomically designed protective, strain reliever hand grips on both ends

Model number	Description	Weight (lbs)
HTWH4	Bonded twin hoses with quick connect couplers, length 13 ft	7.7
HTWH5	Bonded twin hoses with quick connect couplers, length 16.5 ft	8.4
HTWH6	Bonded twin hoses with quick connect couplers, length 19.5 ft	10.1
HTWH8	Bonded twin hoses with quick connect couplers, length 26 ft	11.7
HTWH10	Bonded twin hoses with quick connect couplers, length 32 ft	15.0
HTWH50	Bonded twin hoses with quick connect couplers, length 164 ft	68.8
HTWH75	Bonded twin hoses with quick connect couplers, length 246 ft	102.7
HTWH100	Bonded twin hoses with quick connect couplers, length 330 ft	136.0
CF4F	Female half coupler, 1/4" NPT Female	0.7
CM4F	Male half coupler, 1/4" NPT Female	0.7

HTWR1 TORQUE WRENCH HOSE REEL

- ▶ Accommodates twin line hoses up to 330 feet long
- ▶ Supplied with twin 1.5 feet long lead hose for easy connection to main line hoses
- ▶ Disc brake allows for hose release speed control
- ▶ Fixing holes at the base of frame
- ▶ Weight 84 lbs

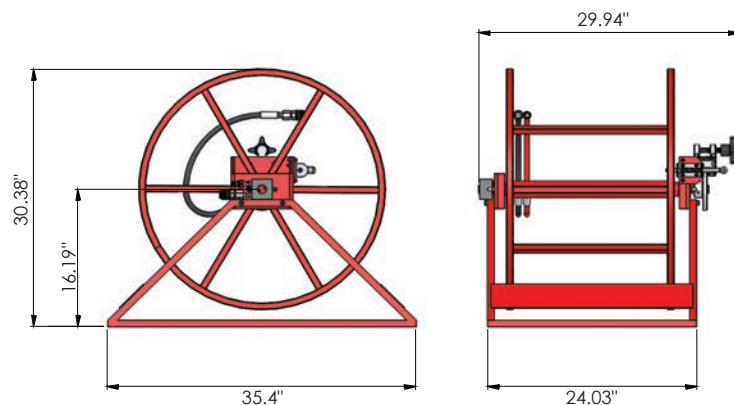

Note: We recommend the use of HTWR1 hose reel with hose lengths of 164 ft or more