RSD | HEAVY DUTY SKATES WITH GROOVED GUIDE - DOUBLE ROLLER

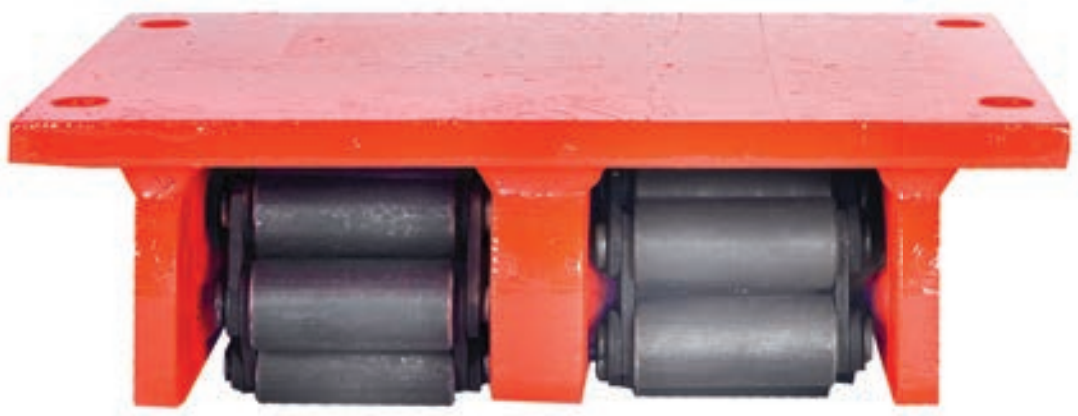

Capacities from 88 to 441 tons

Choice of 7 models available

Fitted with large load bearing top plate

- Low height double roller design for even greater stability and safety
- Twin center plate chain guides reduce wear significantly
- Fixing bolt holes (6 nr.) included as standard feature
- Maximum recommended speed of movement 16 feet per minute
- Can be used as a conveyor in fixed position under the moving load

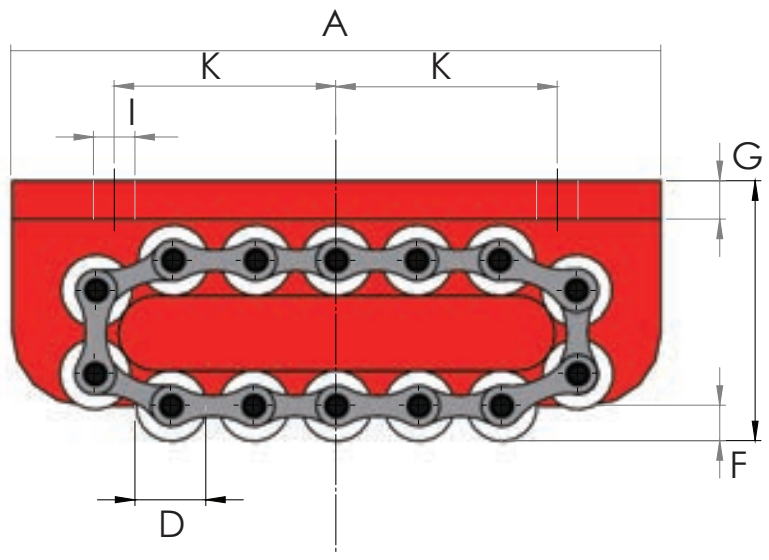

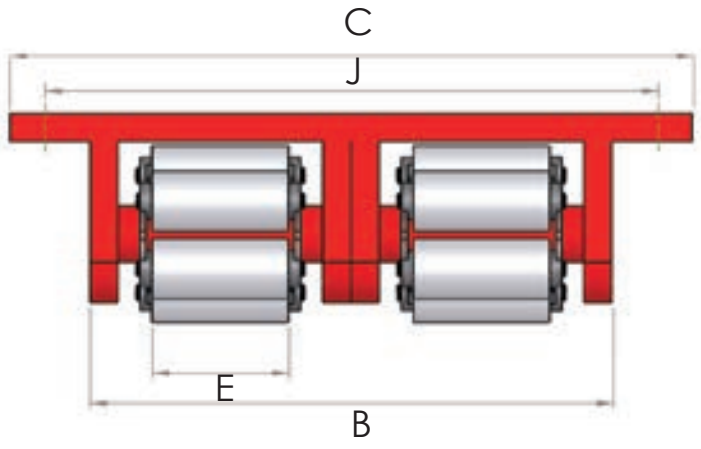

Model number	Capacity (tons)	Rollers in contact	Rollers total	Weight (lbs)	Dimensions (in)										
					A	B	C	Ø D	E	F	G	H	Ø I	J	K
RSD80	88	2x4	2x13	79.8	10.64	10.24	13.4	1.18	2.68	0.39	0.55	4.1	0.71	12.02	3.74
RSD100	110	2x6	2x17	126.8	12.61	11.03	14.18	1.18	2.68	0.39	0.71	4.53	0.71	12.81	4.73
RSD130	143	2x4	2x13	211.6	14.97	13.24	15.76	1.65	2.99	0.75	0.75	5.71	0.87	15.37	5.91
RSD170	187	2x6	2x17	385.8	20.88	14.34	18.91	1.97	3.39	0.75	0.75	6.5	0.87	16.94	8.27
RSD200	220	2x8	2x21	456.4	22.85	14.34	18.91	1.97	3.39	0.75	0.91	6.7	1.02	16.94	9.85
RSD300	331	2x9	2x23	672.4	25.61	16.15	22.06	1.97	3.94	0.79	1.1	7.49	1.02	19.31	9.46
RSD400	441	2x13	2x31	1069.2	35.46	16.15	23.25	1.97	3.94	0.79	1.5	7.88	1.3	19.7	14.18