


SPP | HEAVY DUTY HYDRAULIC PULLERS

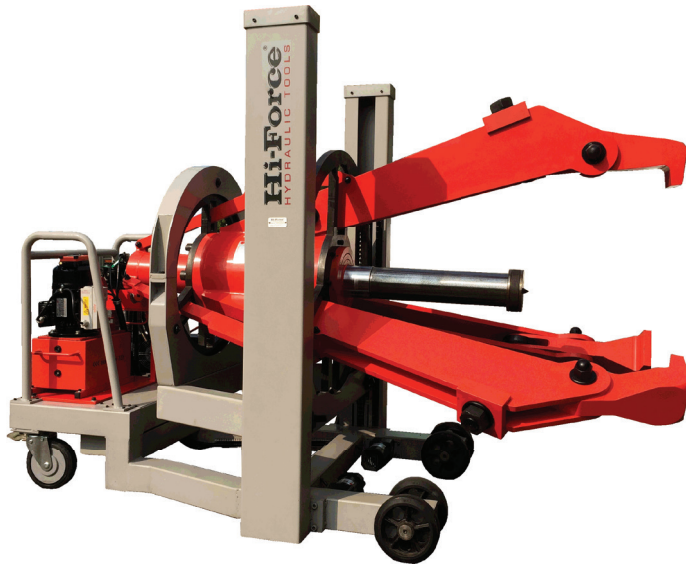

Capacities from 75 to 220 tonnes

Wireless remote controlled operation

Power driven trolley with wheel lock function

- ▶ Combination 2-way and 3-way jaw puller
- ▶ Twin vertical support posts for increased stability & puller jaw height adjustment
- ▶ Self-centering, 180° rotating pulling jaws offer added versatility during positioning
- ▶ Anti-slip mechanism fitted to puller jaws for increased safety
- ▶ Powered by standard HEP2 series electric driven hydraulic pump

Model number	Capacity (tonnes)	Motor voltage	Stroke (mm)	Weight (kg)	Reach (mm)		Spread (mm)		Dimensions (mm)		
					min	max	min	max	Length	Width	Height
Puller with 50 Hz motor											
SPP7515	75	110/115V	165	660	490	700	110	1220	2200	1200	1615
SPP7525	75	220/240V	165	660	490	700	110	1220	2200	1200	1615
SPP7545	75	380/440V	165	660	490	700	110	1220	2200	1200	1615
SPP12015	120	110/115V	170	888	900	1100	150	1220	2410	1200	1610
SPP12025	120	220/240V	170	888	900	1100	150	1220	2410	1200	1610
SPP12045	120	380/440V	170	888	900	1100	150	1220	2410	1200	1610
SPP22015	220	110/115V	170	1300	900	1100	150	1220	2470	1270	1630
SPP22025	220	220/240V	170	1300	900	1100	150	1220	2470	1270	1630
SPP22045	220	380/440V	170	1300	900	1100	150	1220	2470	1270	1630
Puller with 60 Hz motor											
SPP7516	75	110/115V	165	660	490	700	110	1220	2200	1200	1615
SPP7526	75	220/240V	165	660	490	700	110	1220	2200	1200	1615
SPP7546	75	380/440V	165	660	490	700	110	1220	2200	1200	1615
SPP12016	120	110/115V	170	888	900	1100	150	1220	2410	1200	1610
SPP12026	120	220/240V	170	888	900	1100	150	1220	2410	1200	1610
SPP12046	120	380/440V	170	888	900	1100	150	1220	2410	1200	1610
SPP22016	220	110/115V	170	1300	900	1100	150	1220	2470	1270	1630
SPP22026	220	220/240V	170	1300	900	1100	150	1220	2470	1270	1630
SPP22046	220	380/440V	170	1300	900	1100	150	1220	2470	1270	1630