

TWP | PISTOL GRIP PNEUMATIC TORQUE MULTIPLIERS




Torque capacities up to 4400 lbf.ft

Repeatable accuracy of +/- 5%

Lightweight and durable construction

- ▶ Air driven, single stage torque multipliers offering torque capacities from 150 to 4400 lbf.ft (200 to 6000 Nm)
- ▶ Ultra lightweight and durable construction with powerful performance for accurate tightening of bolted components
- ▶ Reversible, pistol grip design air motor allows for bi-directional torqueing
- ▶ Smooth, non-impacting design of planetary gears minimizes wear to components
- ▶ Gearbox manufactured from high grade steel and electrogalvanized for increased corrosion protection
- ▶ Slim line design of gearbox allows access in narrow spaces
- ▶ Sensitive trigger control allows for easy reaction arm positioning
- ▶ Average air consumption of 49.5 cubic feet per minute from a standard airline pressure of 116 psi (23 litres per second at 8 bar)
- ▶ Supplied with a FRL filter, regulator and lubricator unit including class 1.0 air inlet pressure gauge and 10 feet long hose (see page 101)

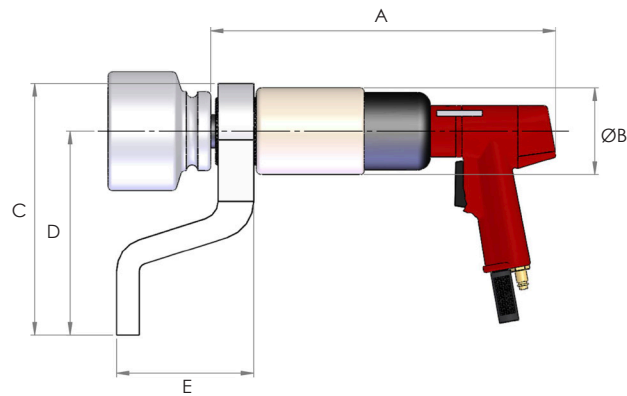

Model number	Torque capacity *		Square drive size	R.P.M. at max pressure	Weight (lbs)	Dimensions (in)				
	lbf.ft	Nm				A	B	C	D	E
TWP09S	150 - 670	200 - 900	¾"	24	7.1	12.92	3.15	4.87	3.74	3.78
TWP15S	220 - 1110	300 - 1500	1"	12	10.4	13.51	3.47	6.8	5.24	4.33
TWP22S	370 - 1620	500 - 2200	1"	7	11.2	14.18	3.47	6.8	5.24	4.33
TWP32S	590 - 2360	800 - 3200	1"	4	12.8	15.09	3.47	6.8	5.24	4.33
TWP40S	620 - 3100	850 - 4200	1"	4	12.8	15.09	3.47	6.8	5.24	4.33
TWP60S	880 - 4400	1200 - 6000	1 ½"	4	17.0	15.76	4.02	9.69	7.64	5.83

*Minimum torque value at 22 psi, maximum torque value at 116 psi airline pressure. Weight is without reaction arm.