

TWS-N | HYDRAULIC TORQUE WRENCHES - SQUARE DRIVE





Torque capacities up to 26860 lbf.ft

Torque accuracy of +/- 3%

Working pressure 10000 psi

- ▶ Compact, lightweight aluminum body construction
- ▶ Output torque capacities from 1254 to 26860 lbf.ft (1727 to 36992 Nm)
- ▶ Choice of square drive sizes from ¾" to 2 ½"
- ▶ Reversible square drive for tightening or loosening applications
- ▶ Multi-position reaction arm with safety lock feature
- ▶ All models are fitted with a multi-directional 360° x 180° swivel with quick release couplings. The multi-directional feature enables easy positioning of hydraulic hoses during operation, preventing damage from pinching or kinking
- ▶ High quality torque wrench sockets for use with TWS-N range hydraulic wrenches are listed on pages 87 and 88
- ▶ Optional allen hex drives available from ½" to 2 ¼" and 14 to 60 mm (see page 89)

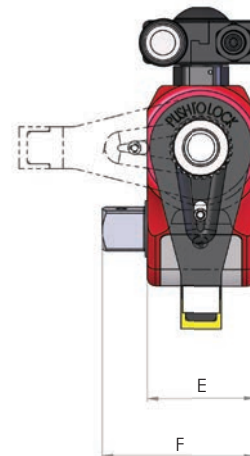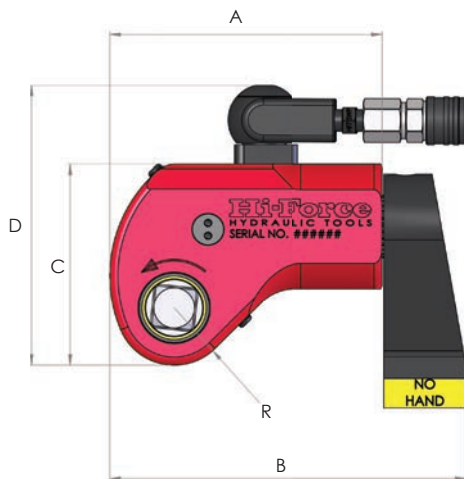

Model number	Torque capacity		Square drive size	Weight including reaction foot (lbs)	Dimensions (in)						
	lbf.ft at 10000 psi	Nm at 700 bar			A	B	C	D	E	F	R
TWS17N	1254	1727	¾"	4.2	5.28	6.86	3.66	5.56	2.01	2.88	1.1
TWS45N	3289	4529	1"	10.6	6.7	8.75	4.96	6.9	2.68	3.86	1.42
TWS100N	7527	10064	1 ½"	19.8	8.79	11.54	6.42	8.31	3.62	5.28	1.81
TWS150N	10873	14974	1 ½"	33.1	9.73	12.73	7.45	9.34	3.94	5.44	2.13
TWS370N	26860	36992	2 ½"	71.6	12.96	17.02	9.42	11.39	5.4	7.88	2.6