


MFS | MECHANICAL FLANGE SPREADERS


Suitable for bolt diameters up to 1 1/4"

Maximum spread 9.1 inches

No external power source required

- ▶ Manually operated mechanical feed screw design
- ▶ Capable of opening flanges up to 2 x 3 3/4" thickness
- ▶ Economical and safe operation
- ▶ High grade steel construction with high tensile cross bolt
- ▶ Case hardened spreading wedge
- ▶ Compact, portable and easy to use

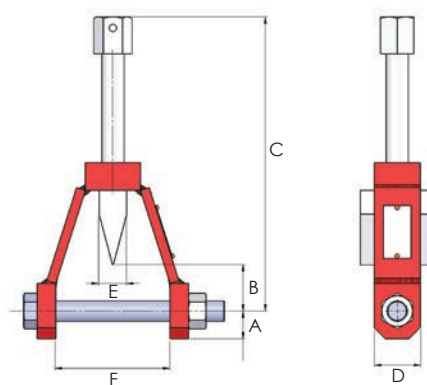

Model number	Pin diameter		Min flange bolt hole diameter	Maximum flange thickness		Weight (lbs)
	inch	mm		inch	mm	
MFS16	5/8"	16	1 1/16"	2 x 7/8"	2 x 22	4.9
MFS19	3/4"	19	1 3/16"	2 x 1 3/8"	2 x 35	6.0
MFS22	7/8"	22	1 5/16"	2 x 1 13/16"	2 x 47	9.0
MFS25	1"	25	1"	2 x 2 7/16"	2 x 62	14.1
MFS28	1 1/8"	28	1 1/8"	2 x 2 3/4"	2 x 70	18.1
MFS31	1 1/4"	31	1 1/4"	2 x 3 3/4"	2 x 95	21.2

Dimensions (in)						
A	B (max)	C (min)	C (max)	D	E	F
0.99	1.1	7.29	9.14	1.58	0.99	2.76
1.18	1.97	7.29	10.01	1.97	0.99	3.74
1.18	1.97	9.73	12.53	1.97	1.18	4.89
1.18	3.35	9.73	13.91	1.97	1.18	6.11
1.18	3.15	10.84	15.05	2.36	1.58	7.13
1.26	3.31	10.84	15.17	2.36	1.58	9.1