

HCC | CHAIN CUTTERS





Cutting capacities up to 1.97 inches diameter

Smooth guillotine cutting action

Working pressure 10000 psi

- ▶ Single acting spring assisted return hydraulic piston
- ▶ High grade steel construction
- ▶ Swivel locking safety guard allows easy access for material to be cut
- ▶ Specially toughened high tensile steel blades and jaws
- ▶ Includes quick connect hydraulic coupling for easy connection to pump and hose
- ▶ Designed for cutting grade 100 and 47 HRC high tensile steel chains and reinforcing bars

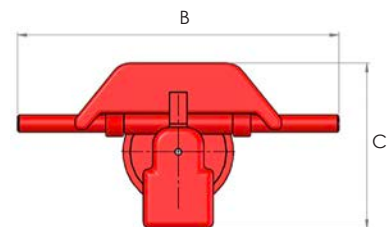

Model number	Output (tons)	Cutting capacity Ø (in)	Maximum allowed		Oil capacity (in³)	Weight (lbs)	Dimensions (in)		
			Chain grade	Steel hardness			A	B	C
HCC26-100	77	1.02	100	47 HRC	16.84	50.7	17.34	7.09	7.09
HCC34-100	110	1.34	100	47 HRC	30.01	88.2	16.15	18.12	9.85
HCC46-100	154	1.81	100	47 HRC	59.78	158.7	22.26	25.02	13.59
HCC50-100	160	1.97	100	47 HRC	67.1	169.8	22.26	25.02	14.18

Replacement blades for HCC chain cutter models:

Blade part number	Blade type	For cutter
HCC26-4M100	Moving	HCC26-100
HCC26-4S100	Static	HCC26-100
HCC34-5M100	Moving	HCC34-100
HCC34-5S100	Static	HCC34-100
HCC46-11M100	Moving	HCC46-100
HCC46-11S100	Static	HCC46-100
HCC50-17M100	Moving	HCC50-100
HCC50-17S100	Static	HCC50-100