

MHX-PU | MANUALLY OPERATED HYDROTEST PUMP UNITS





Choice of 5 models available

Maximum output pressures up to 14500 psi

Two stage displacement with manual T-Handle changeover plunger

- ▶ Supplied as pump unit and operating lever only, reservoir not included
- ▶ Includes four bolt fixing kit with gasket for easy mounting on fluid reservoir
- ▶ All other features are as specified for the MHX pumps

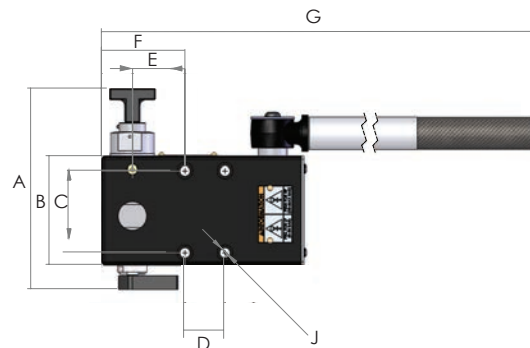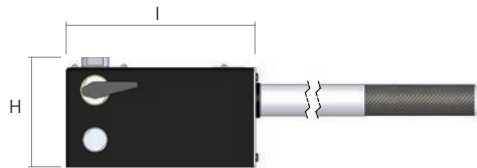

Model number (pump only)	Working pressure (psi)	Valve type	Displacement per stroke (in ³)		Changeover pressure (psi)	Outlet port	Suction port	Weight (lbs)
			1 st stage	2 nd stage				
MHX100PU	1450	2-way	3.05	1.34	725	3/8" NPT	3/8" NPT	11
MHX300PU	4350	2-way	3.05	0.49	725	3/8" NPT	3/8" NPT	11
MHX500PU	7250	2-way	3.05	0.24	725	3/8" NPT	3/8" NPT	11
MHX700PU	10150	2-way	3.05	0.18	725	3/8" NPT	3/8" NPT	11
MHX1000PU	14500	2-way	3.05	0.12	725	3/8" BSP	3/8" NPT	11

Model number	Dimensions (in)									
	A	B	C	D	E	F	G	H	I	J
All models	7.09	3.74	2.82	1.38	1.81	2.72	29.94	4.14	6.97	4 x M8

RESERVOIR



Model number	Description
MHR15	4 gallons standard reservoir