

SCP | SELF-CONTAINED HYDRAULIC PULLERS





Capacities from 9 to 29 tons

Self-contained hydraulic system

Operates in any position

- ▶ Available in a choice of 2-way or 3-way puller configurations (see Note)
- ▶ Integrated hydraulic cylinder, pump and puller assembly for easy operation
- ▶ Ergonomic 360° rotating handle for easy positioning during use
- ▶ Incorporates safety valve to minimize the risk of puller overload
- ▶ Spring-loaded center point for easy centering of the puller to the shaft
- ▶ Supplied complete with piston rod extension piece and storage case

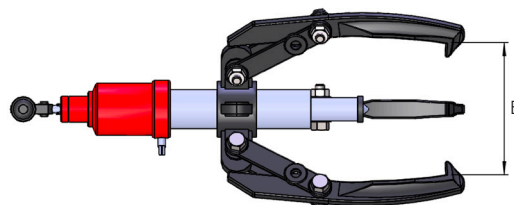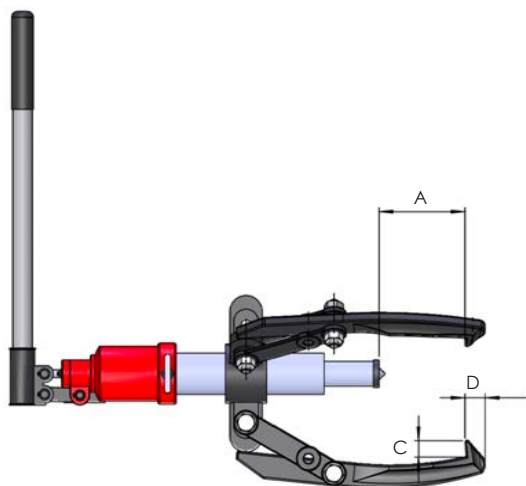

Model number	Capacity (tons)	Type of puller	Hydraulic stroke (in)	Piston rod extension (in)	Weight (lbs)	Dimensions (in)				
						A	B (min)	B (max recommended)	C	D
SCP103	9	2 & 3-way jaw	3.23	1.97	25.6	7.68	1.18	9.85	0.87	0.24
SCP203	19	2 & 3-way jaw	3.23	3.94	52.2	10.84	1.97	14.18	1.14	0.39
SCP303	29	2 & 3-way jaw	4.33	5.91	110.2	15.96	3.94	21.28	1.5	1.42

Note: All models are supplied with a combination crosshead. This combination crosshead can be used as a 2-jaw puller when the legs are arranged at 180° and as a 3-jaw puller when the legs are arranged at 120°.